

AMWF-L-S


PNEUMATIC FLEX LOCATOR PINS



AMWF-L-S



AMWF-L-S-G

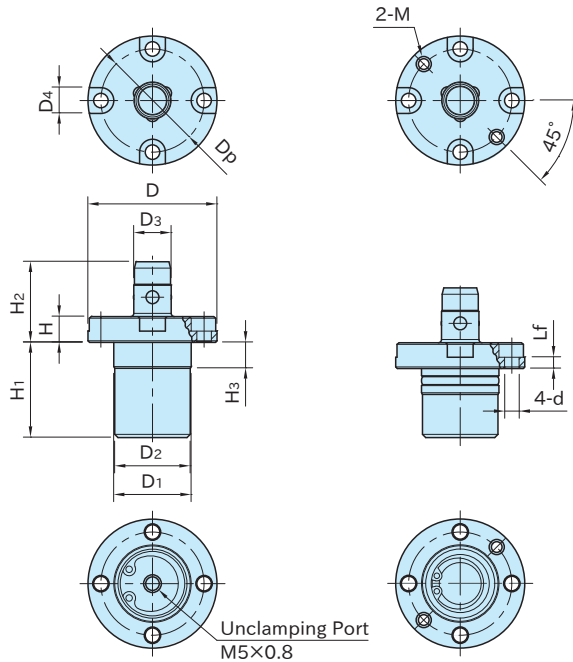

AMWF-L-S (Port Style)

AMWF-L-S-G (Direct Style)

Body	Ball	Coiled Spring
S45C steel Electroless nickel plated	SUS440C stainless steel	SUS304WPB stainless steel

Part Number	D ₁ (g6)	H ₃	D ₂	H ₁	D	H	D ₃ (h8)	H ₂	d	Lf	D ₄	Dp
AMWF18L-4S	24	8	23.4	29.5	40	8	12	25	4.5	3.5	8	32
AMWF26L-4S	32	8.5	31.4	31.7	51	9.5	16	28.5	5.5	4	9.5	41
AMWF18L-4S-G	24	8	23.4	24.5	40	8	12	25	4.5	3.5	8	32
AMWF26L-4S-G	32	8.5	31.4	25.5	51	9.5	16	28.5	5.5	4	9.5	41

Part Number	M	Air Pressure (MPa)	Clamping Force (N)	Weight (g)
AMWF18L-4S	—	0.5	250	154
AMWF26L-4S	—		350	289
AMWF18L-4S-G	M4x0.7		250	136
AMWF26L-4S-G	M5x0.8		350	252

Reference

- How To Install PNEUMATIC FLEX LOCATORS
- How To Use PNEUMATIC FLEX LOCATORS

Related Product

AMWF-BU PNEUMATIC FLEX LOCATOR BUSHINGS